

FRIONOR Dishwasher with reverse osmosis system


integrated softener and drain pump

R4127



- Integrated softener, reverse osmosis unit and drain pump
- Integrated rinsing fluid suction pump
- Energy saving
- Low operating cost
- Easy reverse osmosis disconnection for ironing in traditional washing

In the middle of a rush, this glass washer provides very fast performance and low water consumption. No more wiping for your staff. Perfect quality and attractive price.

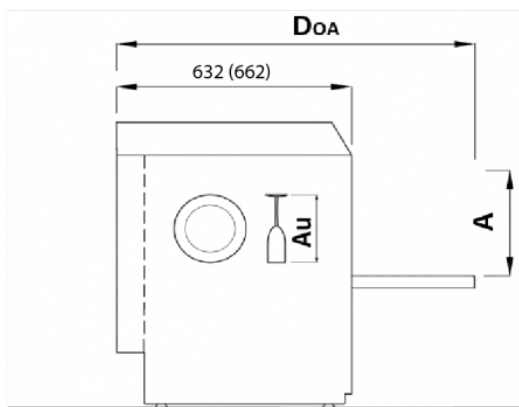

Technical Specifications

MEASUREMENT DIMENSIONS (MM)	
SOFTENER	included
BODYWORK	
GLASS PASSAGE HEIGHT (MM)	
DURATION OF CYCLES (SC)	60 -120 – 180 – 480
DRAIN PUMP	included
DOSE RINSE PRODUCT	included
WASHING PRODUCT DOSER	
TANK CAPACITY (L)	11
CONSO. WATER PER CYCLE (L)	
SOUND LEVEL (DB)	68
CART NUMBER	
CART DIMENSION (MM)	500 x 500
WASHING TEMPERATURE (°C)	
RINCING TEMPERATURE (°C)	
ROOM TEMPERATURE (°C)	
TEMPÉRATURE ENTRÉ EAU (°C)	
HARDNESS WATER SUPPLY. (°DF)	
WEIGHT (KG)	65
POWER SUPPLY	
PUISSANCE (KW)	
GROUNDING OUTLET	Mandatory
PROTECTION FACTOR	IPX1

To discover more about this product, scan this QR code.

