


## FRIONOR hollow ice machine

Production 22 kg / 24h


R4016

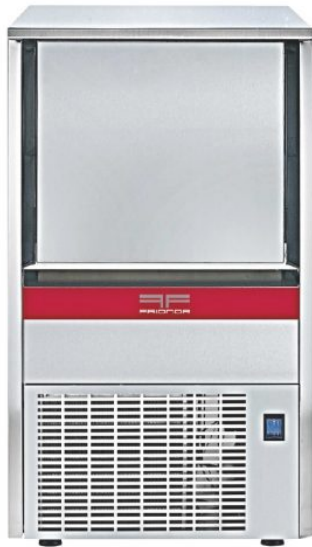

Small footprint  
Low water consumption  
Suitable for calcareous waters  
Attractiveness and price

This professional ice maker has been designed for the hotel and restaurant sector: bars, restaurants, pubs... Its small size will be one of its undeniable assets. Thanks to its pallet system, this machine will be more resistant to limescale and will thus guarantee the quality of the ice cubes while ensuring low water consumption.

Depending on the hardness of the water, we recommend an anti-limestone filter upstream to prolong the durability of the machine.

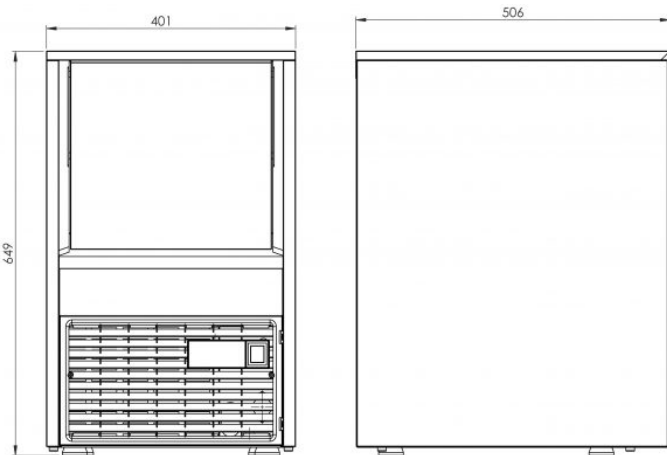

## Technical Specifications

TYPE OF INSTALLATION	BUILT-IN
MEASUREMENT DIMENSIONS (MM)	L.401 x d.506 x h.643
TYPE DE GLAÇONS	
ADJUSTABLE FEET	
BODYWORK	
PRODUCTION NB/ICE CUBES PER CYCLE	15/ cycle
PROD. CAPACITY IN 24H (KG)	22
STORAGE CAPACITY (KG)	9
COOLING	AIR
ICE PRODUCTION SYSTEM	Chip system
WATER CONSUMPTION (APPROX)	
ROOM TEMPERATURE (°C)	
WATER TEMPERATURE (C°)	5 to 35
POWER SUPPLY	
CONSUMPTION (WH)	
GROUNDING OUTLET	Mandatory
REFRIGERANT FLUID	R290
WEIGHT (KG)	

To discover more about this product, scan this QR code.

